


| Transportability

| Flexibility

| Performance

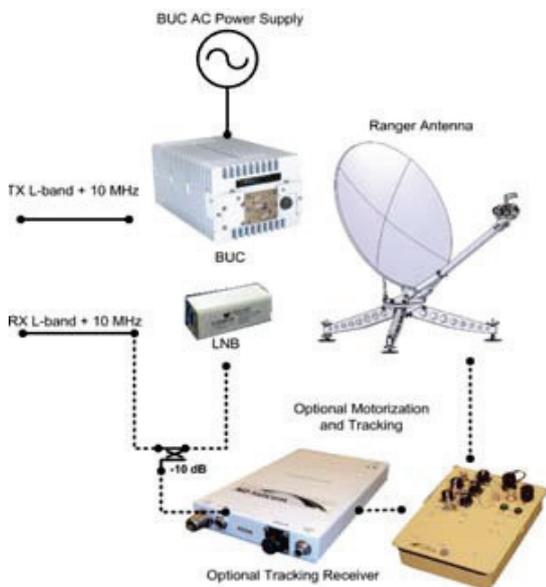

Ranger 1200 Integrated Satcom Terminals

Transportability / Flexibility / Performance

Ranger 1200 terminals offer the most versatile, easily deployable and operator-friendly access available for star, mesh or hybrid satellite networks. Readily configurable for X, Ku or Ka-Band space segment, Ranger terminals are fully compatible with SkyWAN® networks, as well as conventional SCPC and IP-based networks.

An innovative, modular antenna design incorporating a carbon-fiber reflector which is optimized for both stiffness and portability ensures ease of use and superior performance in harsh environments. SMC reflector variants are available to match operational needs with value and portability




Optional motorization and tracking is available via modular “add-on” components to meet DSCS and/or inclined orbit applications.

Operational frequency band is defined by the integrated feed & electronics package. Common IFL interfaces provide an easy means for changing bands by simply exchanging feed booms.

The integrated feed assembly transports in a separate case, making transport and storage for alternate band configurations clean and straight-forward.

KEY FEATURES

- Small, Lightweight and highly portable
- 1.2m 4-piece Carbon Fiber or 2-piece precision-cut SMC reflector (4-piece as option)
- Readily configurable for X, Ku or Ka-Band (only in CFRP) operation; field-reconfigurable in seconds
- X-Band configurations are XTAR, DCSC & WGS compatible
- Integrated Feed/Boom/BUC/LNB package for each frequency band
- Modular motorization/tracking/autopointing option is easily field-upgradeable
- L-Band Inter-Facility Link & interfaces compatible with all common modem platforms
- Satellite network & modem platform agnostic, including SkyWAN®, IP and SCPC

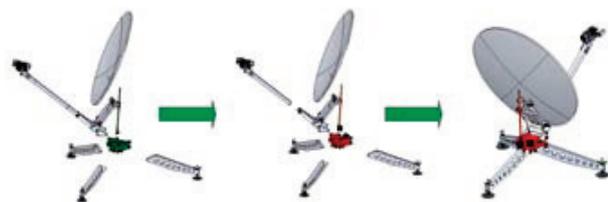

Simple substitution of two key pedestal elements motorizes the AZ and EL axes. Automatic tracking is provided by an ACU with several tracking signal options.

Parameter	X-Band	Ku-Band	Ka-Band
Standard Feed Configuration	2-Port CP 1.5 dB AR	2-Port LP copol or xpol	2-Port CP CFRP Only
RX Frequency Range (GHz)	7.25 – 7.75	10.95 – 12.75	20.2 – 21.2
RX Gain (Midband) (dBi)	37.3	41.6	46.1
G/T (Midband; EL = 20°) (dB/K)	16.3	20.3	21.1
TX Frequency Range (GHz)	7.9 – 8.4	13.75 – 14.5	30 – 31
TX Gain (Midband) (dBi)	37.9	43.4	49.3
TX Amplifier/BUC Power (Psat) (W)	30	40	25
EIRP (Midband @P1dB) (dBW)	51.4	59.1	59.3

Case Description	Size (Statute)				Size (Metric)			
	L/in	W/in	H/in	V/ft3	L/cm	W/cm	H/cm	V/m3
Reflector 4pc	30	27	17	11.1	107	34	89	0.32
Feed Assemb.	52	28	25	21.1	133	72	64	0.60
Pedestal 1	37.5	27.5	14.5	11.6	115	67	44	0.33
Electronics	36	23	17	8.2	92	59	44	0.24
Motorization	36	23	17	8.2	92	59	44	0.24
Reflector 2pc	51	31.5	13.5	12.6	130	81	35	0.36
Total				67				2

* G/Ts and EIRP values are based upon ‘typical’ amplifier selections. Any terminal can be configured with alternate LNB and/or BUC selections to tailor performance for given applications. Specs for CFRP version.

Antenna System	1.2m Single-offset; segmented, CFRP 4-Piece; SMC 2/ (4)- Piece with precision latching
Pedestal	High-stiffness tri-pod style; aluminium; quick-assembly with captive hardware
Travel Range	AZ: +/- 180 deg EL: 0 – 90 deg POL: +/- 90 deg (linear feeds)
Wind (anchored)	Operational: 30mph gusting to 45mph; Survival @ stow: 75mph
Operating Temp Range	Outdoor Equipment: -40C to + 60C Indoor Equipment: -10C to +40C

HEADQUARTERS

ND SatCom GmbH
Graf-von-Soden-Strasse
88090 Immenstaad
Germany
PHONE: +49 7545 939 0
FAX: +49 7545 939 8780
E-Mail: info@ndsatcom.com

CHINA

ND SatCom (Beijing) Co. Ltd.
PHONE: +86 10 6590 6869/6878

MIDDLE EAST

ND SatCom FZE
PHONE: +97148865012

www.ndsatcom.com

ND SATCOM